T8/T5 Tube Series

Tube series is designed to directly replace fluorescent tubes, part of LED white light family and incorporates SMD white LEDs, with two different installations.
1. Applied with a magnetic ballast, re-wire the fixture
2. Applied with a magnetic ballast, add a LED starter, no need to re-wire the fixture

Neo-NeoN™ UK PLC

LEDs Light It

For brochures and more in depth information please contact us below:
Tel: +44(0) 1908 217799 Email: sales@neoneonuk.com Web: www.neoneonuk.com
Neo Neon UK PLC, Technology House, Michigan Drive, Tongwell, Milton Keynes MK15 8HQ

Municipal Hall, Jiangmen, China

Item No.	T8-L600-9W-07	T8-L1200-18W-07
Light Source	SMD LED	SMD LED
Power	9W	18W
Voltage	85-265V AC	85-265V AC
Beam Angle	120°	120°
CRI	80	80
CCT	NW/PW	NW/PW
Luminous Flux	750 lm / 800 lm	1500 lm / 1600 lm
Replacing Fluorescent	18W	36W
Main Material	Milky PC Cover+Aluminum Heat Sink	Milky PC Cover+Aluminum Heat Sink
Pcs/Carton	16pcs	16pcs
Packing Dimensions	620x175x175mm	1245x175x175mm

Lux-Distance Curve





Candle Power Distribution





Dimensional Diagrams

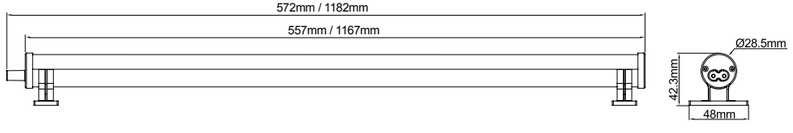

Accessories and Connecting Mode

Item No.	T8-L600-10W-12	T8-L1200-20W-12
Light Source	SMD LED	SMD LED
Power	10W	20W
Voltage	85-277V AC	85-277V AC
Beam Angle	120°	120°
CRI	80	80
CCT	NW/PW	NW/PW
Luminous Flux	750 lm / 800 lm	1500 lm / 1600 lm
Replacing Fluorescent	18W	36W
Main Material	Milky PC Cover+Plastic Heat Sink	Milky PC Cover+Plastic Heat Sink
Pcs/Carton	16pcs	16pcs
Packing Dimensions	665x175x175mm	1265x175x175mm

Lux-Distance Curve





Candle Power Distribution





Dimensional Diagrams

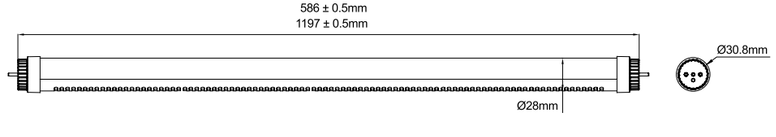

Accessories

LED Starter

Remark:
Applied with a magnetic ballast only

Item No.	T8-L600-9W-08-A	T8-L1200-18W-08-A	T8-L1500-25W-08-A
Light Source	SMD LED	SMD LED	SMD LED
Power	9W	18W	25W
Voltage	85-265V AC	85-265V AC	85-265V AC
Beam Angle	120°	120°	120°
CRI	80	80	80
CCT	NW/PW	NW/PW	NW/PW
Luminous Flux	750 lm/800 lm	1500 lm/1600 lm	1800 lm/1900 lm
Replacing Fluorescent	18W	36W	58W
Main Material	Milky PC Cover+Aluminum Heat Sink	Milky PC Cover+Aluminum Heat Sink	Milky PC Cover+Aluminum Heat Sink
Pcs/Carton	16pcs	16pcs	16pcs
Packing Dimensions	665x175x175mm	1265x175x175mm	1625x175x175mm

Lux-Distance Curve

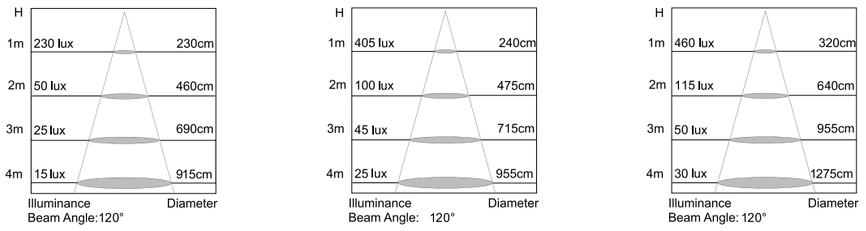

Candle Power Distribution

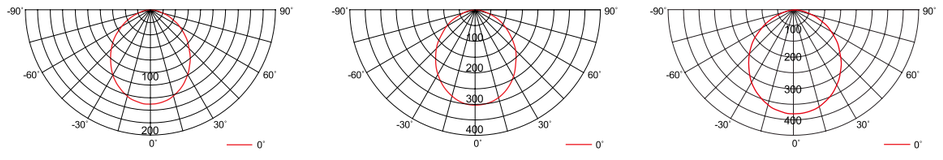

Dimensional Diagrams

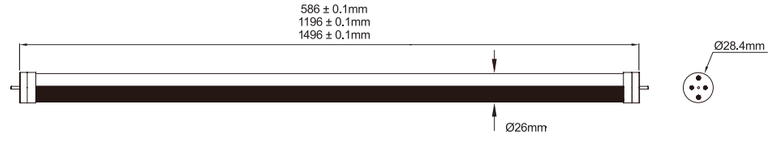

Accessories

LED Starter

Remark:
Applied with a magnetic ballast only

Item No.	T8-L600-9W-01-JB	T8-L1200-18W-01-JB
Light Source	SMD LED	SMD LED
Power	9W	18W
Voltage	220-240V AC	220-240V AC
Beam Angle	136°	136°
CRI	80	80
CCT	NW/PW	NW/PW
Luminous Flux	750 lm/800 lm	1500 lm/1600 lm
Replacing Fluorescent	18W	36W
Main Material	Milky PC Cover+Aluminum Heat Sink	Milky PC Cover+Aluminum Heat Sink
Pcs/Carton	16pcs	16pcs
Packing Dimensions	665x175x175mm	1265x175x175mm

Lux-Distance Curve

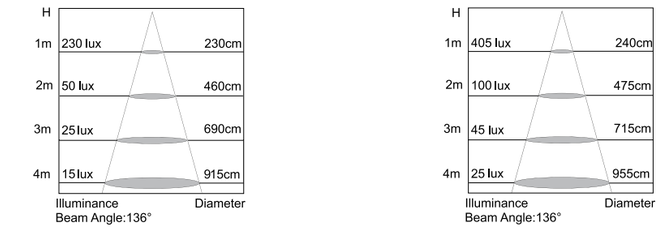

Candle Power Distribution

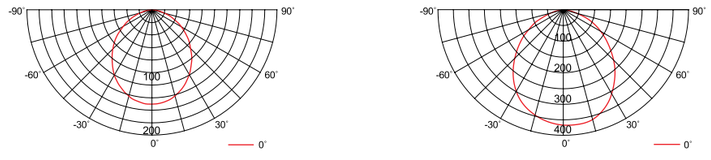

Dimensional Diagrams

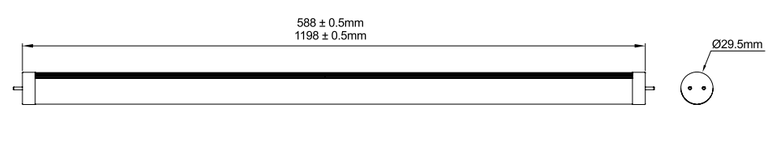

Item No.	T8-L600-9W-02-B	T8-L1200-18W-02-B
Light Source	SMD LED	SMD LED
Power	9W	18W
Voltage	85-277V AC	85-277V AC
Beam Angle	136˚	136˚
CRI	80	80
CCT	NW/PW	NW/PW
Luminous Flux	750 lm / 800 lm	1500 lm / 1600 lm
Replacing Fluorescent	18W	36W
Main Material	Milky PC Cover+Aluminum Heat Sink	Milky PC Cover+Aluminum Heat Sink
Pcs/Carton	16pcs	16pcs
Packing Dimensions	665x175x175mm	1265x175x175mm

Lux-Distance Curve





Candle Power Distribution





Dimensional Diagrams

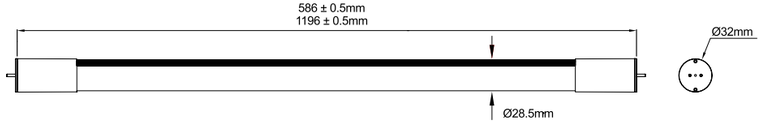

Item No.	T8-L600-9W-13B	T8-L1200-18W-13B
Light Source	SMD LED	SMD LED
Power	9W	18W
Voltage	220-240V AC	220-240V AC
Beam Angle	136˚	136˚
CRI	80	80
CCT	NW/PW	NW/PW
Luminous Flux	750 lm/800 lm	1500 lm/1600 lm
Replacing Fluorescent	18W	36W
Main Material	Milky PC Cover+Aluminum Heat Sink	Milky PC Cover+Aluminum Heat Sink
Pcs/Carton	16pcs	16pcs
Packing Dimensions	665x175x175mm	1265x175x175mm

Lux-Distance Curve





Candle Power Distribution





Dimensional Diagrams

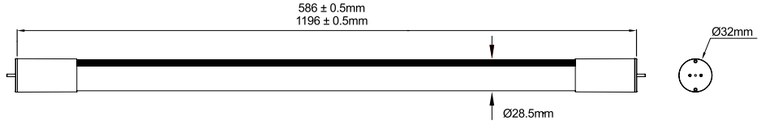

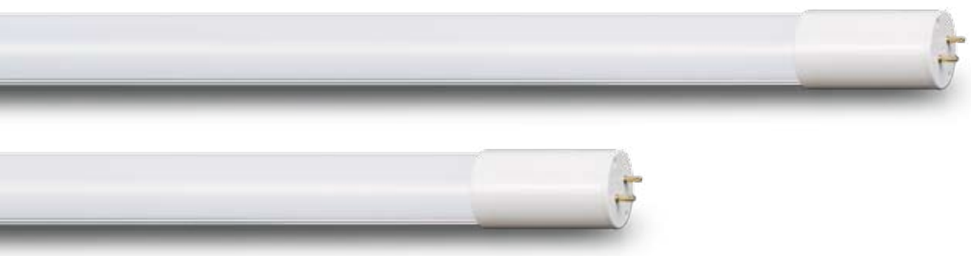

Item No.	T8-L600-9W-09-A	T8-L1200-18W-09-A
Light Source	SMD LED	SMD LED
Power	9W	18W
Voltage	90-277V	90-277V
Beam Angle	136˚	136˚
CRI	80	80
CCT	NW/PW	NW/PW
Luminous Flux	750 lm / 800 lm	1500 lm / 1600 lm
Replacing Fluorescent	18W	36W
Main Material	Milky PC Cover+Aluminum Heat Sink	Milky PC Cover+Aluminum Heat Sink
Pcs/Carton	16pcs	16pcs
Packing Dimensions	715x175x175mm	1325x175x175mm

Lux-Distance Curve





Candle Power Distribution





Dimensional Diagrams

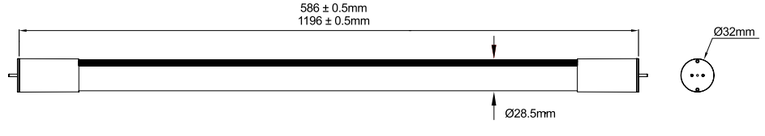

Accessories and accessories

LED Starter

Remark:
Applied with a magnetic ballast only

Item No.	T5-L600-9W-03-C	T5-L1200-18W-03-C
Light Source	SMD LED	SMD LED
Power	9W	18W
Voltage	85-265V AC	85-265V AC
Beam Angle	120˚	120˚
CRI	80	80
CCT	NW/PW	NW/PW
Luminous Flux	700 lm/750 lm	1350 lm/1450 lm
Replacing Fluorescent	14W	28W
Main Material	Milky PC Cover+Aluminum Heat Sink	Milky PC Cover+Aluminum Heat Sink
Pcs/Carton	16pcs	16pcs
Packing Dimensions	600x350x310mm	1200x350x200mm

Lux-Distance Curve





Candle Power Distribution





Dimensional Diagrams